

## Door sign transparenz TNT

Transparent floating information convey lasting elegance.

□ transparenz




Compared to the classic glass signs with four fastening screws, the signs in the System **transparenz** impress with their concealed fastening. They give the inscription area a transparent, floating appearance, which is the special appeal of the glass signs.

## Door sign transparenz TNT

The innovative glass clamping function reduces the installation intervention in the building structure.


□ transparenz

In addition to the flexible use of the sandwich clip version, the same formats can also be equipped with printed solid glass plate for permanent information. Toilets and tea kitchens retain their assigned task and therefore also require only a simple glass clip. In this case, the panes are not permanently glued in the profile, so they can be replaced. The small formats are not only used as door signs. They can also be used to discreetly convey simple pictogram information, floor numbers and explanations of works of art. In addition to the glass surface, the profile is also available for lettering. This aluminum surface is particularly suitable for the application of information in Braille or pyramid lettering.

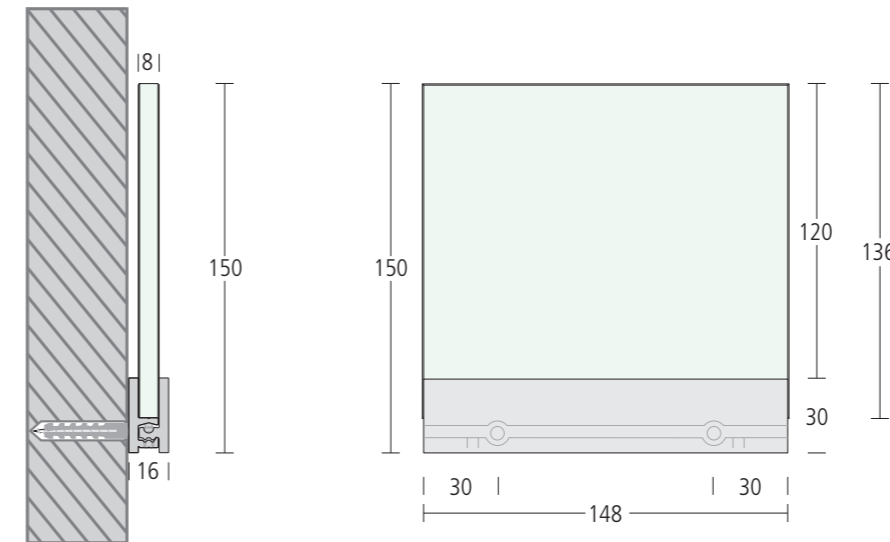

The profile lengths of the glass holders are based on the use of DIN paper formats in the flexible version. For reasons of uniformity, these dimensions were also used as standard for the other signs in the system.

Also available with integrated interchangeable slider glued to the door plate, which convinces with a simple function. (TNTW)

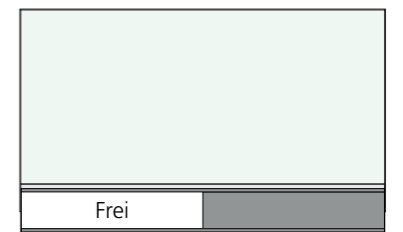


### Dimensions:

(On the example shown TNT 1515 S)

- the nominal dimension is 150 x 150 mm (height x width)
- The glass pane has a dimension of 136 x 149 mm, of which 120 x 149 mm (height x width) remain visible.
- The retaining profiles are shorter by the thickness of the glass facet and thus have a length of 148 mm.
- The clamping area between the profiles is 8.6 mm, minus any adhesive layers, this leaves a glass thickness of 7.8 to 8.2 mm. Thinner materials are also held with compensating shims.
- The wall distance was deliberately kept flat at 4 mm. It can be individually increased with additional spacer material.

### Standard sizes

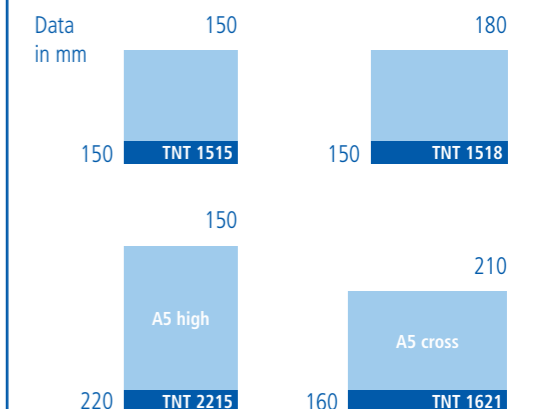

| Article description                     | Surface material  | Size                              | System profile color             |
|---|---|-----------------------------------|----------------------------------|
| TNTFG 1515 S                            | TNTFG 1515 S  | TNTFG 1515 S                      | TNTFG 1515 S                     |
| TNT describes the transparenz door sign | FG Float glass<br>K Crystal clear acrylic<br>G Glass look acrylic | 15 Height in cm<br>15 Width in cm | S Silver anodized<br>L Lacquered |
| TNTW with interchangeable slider        |   |                                   |                                  |