

# Exterior pillars QA

Slim steles for significant routing



quintessenz



Our slim steles for exterior use are one of the most significant elements within the **quintessenz** system.

The generous visible surfaces offer a wide range of options for customisation and can be optimally adapted to the corporate identity of a company, an institution or a location.


08/2026 © meng.de

# Exterior pillars QA

Slim steles with individually exchangeable information spaces



quintessenz

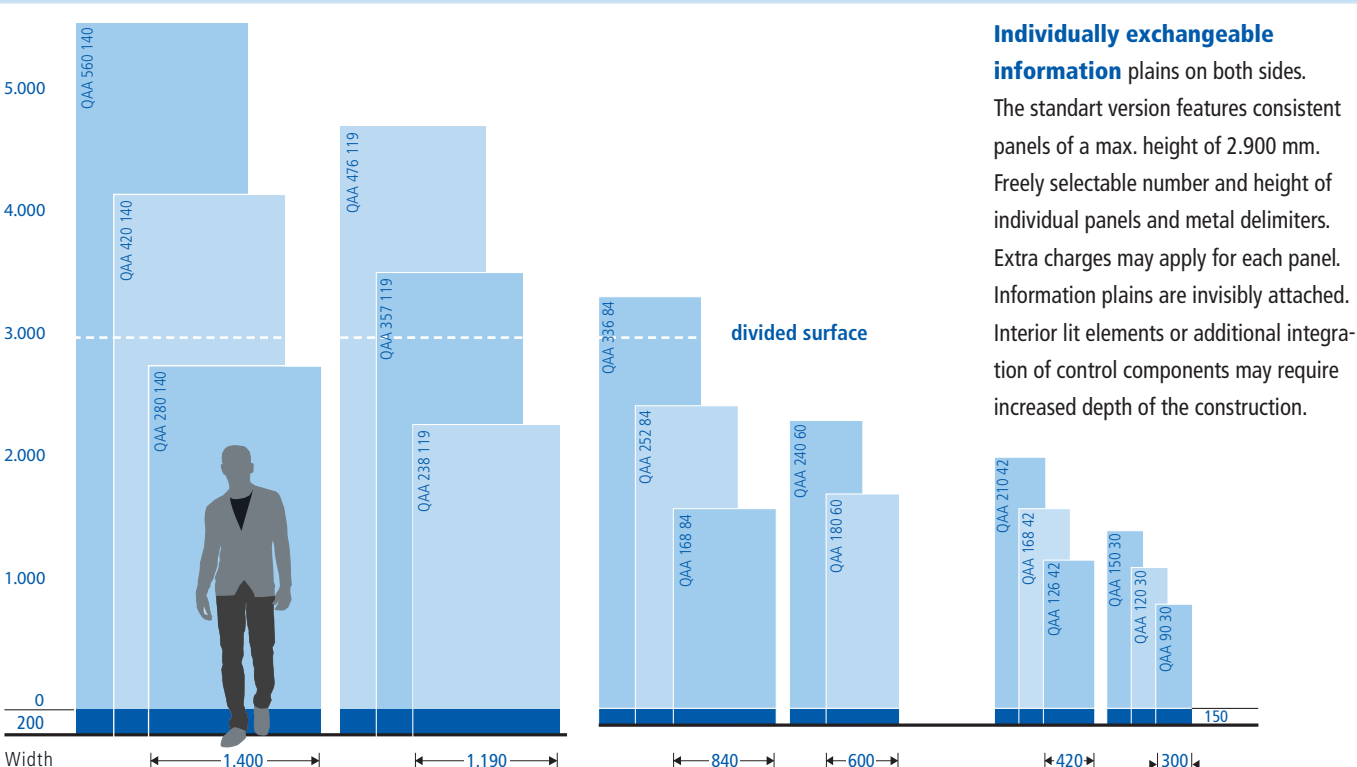

**Individually exchangeable information** plains on both sides.  
The standart version features consistent panels of a max. height of 2.900 mm. Freely selectable number and height of individual panels and metal delimiters. Extra charges may apply for each panel. Information plains are invisibly attached. Interior lit elements or additional integration of control components may require increased depth of the construction.

### Pylon

|                             |          |
|-----------------------------|----------|
| system width                | 1.400 mm |
| system depth                | 230 mm   |
| maximum visible height      | 5.600 mm |
| plus socket                 | 200 mm   |
| plus installation depth     | 200 mm   |
| Total height above ground   | 6.000 mm |
| Strength of Aluminium sheet | 3 mm     |

|                             |          |
|-----------------------------|----------|
| system width                | 1.190 mm |
| system depth                | 210 mm   |
| maximum visible height      | 4.760 mm |
| plus socket                 | 200 mm   |
| plus installation depth     | 200 mm   |
| Total height above ground   | 5.260 mm |
| Strength of Aluminium sheet | 3 mm     |

Interior construction completely made of galvanized steel. Initial setup requires tower crane. Please consider relevant information on groundwork and statics.

### Stele

|                             |          |
|-----------------------------|----------|
| system width                | 840 mm   |
| system depth                | 125 mm   |
| maximum visible height      | 3.360 mm |
| plus socket                 | 150 mm   |
| plus installation depth     | 150 mm   |
| Total height above ground   | 3.660 mm |
| Strength of Aluminium sheet | 2 mm     |

|                             |          |
|-----------------------------|----------|
| system width                | 600 mm   |
| system depth                | 125 mm   |
| maximum visible height      | 2.400 mm |
| plus socket                 | 150 mm   |
| plus installation depth     | 150 mm   |
| Total height above ground   | 2.700 mm |
| Strength of Aluminium sheet | 2 mm     |

Interior construction partly made of galvanized steel and aluminium. Smaller aluminium elements may not require tower crane for setup.

### Small pillar for exterior use

|                             |          |
|-----------------------------|----------|
| system width                | 420 mm   |
| system depth                | 48 mm    |
| maximum visible height      | 2.100 mm |
| plus socket                 | 150 mm   |
| plus installation depth     | 150 mm   |
| Total height above ground   | 2.400 mm |
| Strength of Aluminium sheet | 2 mm     |

|                             |          |
|-----------------------------|----------|
| system width                | 300 mm   |
| system depth                | 48 mm    |
| maximum visible height      | 1.500 mm |
| plus socket                 | 150 mm   |
| plus installation depth     | 150 mm   |
| Total height above ground   | 1.800 mm |
| Strength of Aluminium sheet | 2 mm     |

Interior construction made from aluminium, stiffing made from galvanized steel. Manual installation.

|                                                                                                                             |                                                |                                                                                              |                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QAA 21042                                                                                                                   | QAA 21042                                      | QAA 21042                                                                                    | Please consider additionally available information on intermedeiate sizes and continous, non-seperated metal sheets. We are looking forward to your enquiry on illuminated variants, integrated display cabinets, post boxes or electric bell systems |
| QA refers to quintessenz signs for exterior use<br>"Pylone", "Stelen" and "Säulen" (pillar) indicate our product categories | QAA aluminium<br>QAE burnished stainless steel | Information space available for labelling: 210 x 42 cm<br>Total height above ground 2.250 mm |                                                                                                                                                                                                                                                       |
| Article                                                                                                                     | Material used for plains                       | Size                                                                                         | Customizing                                                                                                                                                                                                                                           |