Ceiling sign transparenz TND

Transparent floating information convey timeless elegance.



Ceiling sign transparenz TND


meng

The innovative glass clamping function of the two aluminum profiles does not require any visible screws.


convey timeless elegance.



transparenz

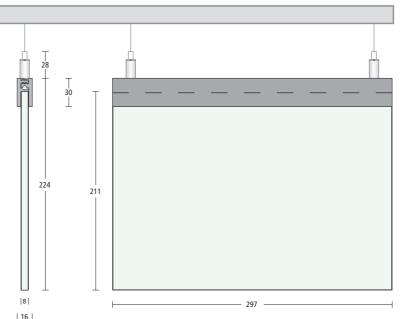

Ceiling suspended signposts in the system **transparenz** offer the special attraction of a valuable information transmission. Even if they appear light due to the transparent surface, the load-bearing capacity of a suspended ceiling with the weight of the panes must be taken into account. Ceiling signs that are seen from both sides require a back cover to avoid mirror writing.

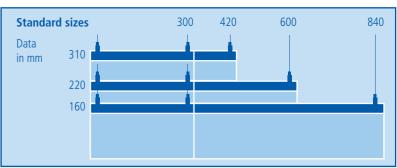

Solid ceilings

Fastening is done with a plastic dowel, the rope is firmly pressed into the dowel screw.



Cavity ceilings

Cavity anchor with expansion device. Anchor and rope screw are equipped with M6 thread. The rope is pressed into the screw. Assembly pliers are available as accessories.



Suspension

It is indented 20 mm from the lateral edge of the shield. The clamping device fixes on tension; if the clamping sleeve is pressed, the sign can be aligned or removed. For **transparenz** signs, the ropes must be shortened to the required length.



Soundproof ceilings

Fixing claws are available for suspended ceiling systems with grid rails.

Special dimensions and material variants are also possible.

TNDG 22	230 S describes the transparenz Ceiling sign	K	G 2230 S Crystal clear acrylic Glass look acrylic	TNDG 22 30	2230 S Height in cm Width in cm	TNDC S L	G 2230 S Silver anodized Lacquered
Article description		Surface material		Size		System profile color	