

Signpost ceiling mounted QD

All elements of our quintessenz series follow the principle of a maximally consistent design.

Σ quintessenz




Ceiling signs make the information look seemingly light and weightless, especially when the elements are hung with elegant fine stainless steel wires.

Signpost ceiling mounted QD

The flat standard elements are anchored in the ceiling by variably adjustable fine stainless steel wires.

Σ quintessenz

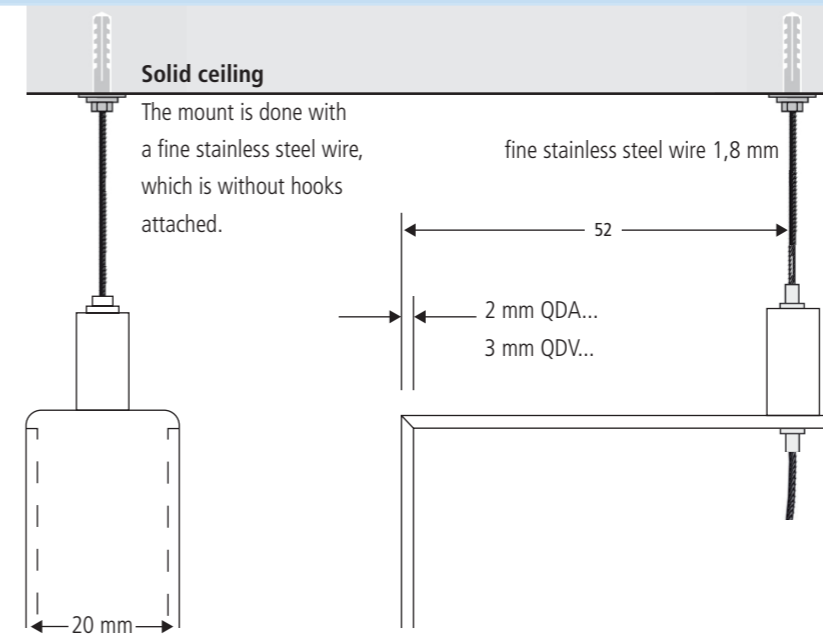

Mounting

Standard distance from the shield's edge is 52 mm. The clamping device is fixed in tension; pressing the clamping sleeve, the shield can be aligned, adjusted or removed. The end of the wire disappears in the shield's body.

Design types

The ceiling-mounted signs are offered in three different designs. An aluminium version (QDA) is made of fully closed cassettes of 20 mm strength.

The (QDV) version may be custom labelled. It consists of a flexible frame construction, in which acrylic glass (antireflex) are fitted flush on both sides. Its label inlays can be changed.


Standardgrößen				
Angaben in mm	300	420	600	840
150	QD..1530	QD..1542	QD..1560	QD..1584
210	QD..2130	QD..2142	QD..2160	QD..2184
300	QD..3030	QD..3042	QD..3060	QD..3084

For the standard sizes

QDA, QDAI und QDV manufacturing programs are stored.


Individual measures

for QDA und QDAI are available up to max. 600 x 1.800 mm, subject to the mounting's loading capacity. For larger elements and exterior applications stronger system profiles, as well as rigid mountings have to be considered as fine steel wires are not allowed. The variable version QDV is only available for interior use and is limited to max. 300 x 840 mm.



Hollow ceiling

Anchor and wire screw are equipped with M6 thread. The wire is pressed into the screw. A mounting clamp is available as an accessory.



Noise insulated ceiling

For systems mounted to noise insulated ceiling, special fastening claws are available.

Article	Variants	Size	Customization
QDA 1584	QDA with hollow Aluminium panels QDAI with integrated detachment protection QDV with non-reflecting Acryl, variable caption inlays supported	QDA 1584 15 height in cm 84 width in cm (The article numbers indicate merely rounded measures.)	Interior-lit ceiling mounted signposts supporting LED illumination and punched out captions are available. Double side labeling is possible.