


## Flex-Monolith Q60AV

A sign system will only meet its requirements if it can be designed flexibly.



Σ quintessenz

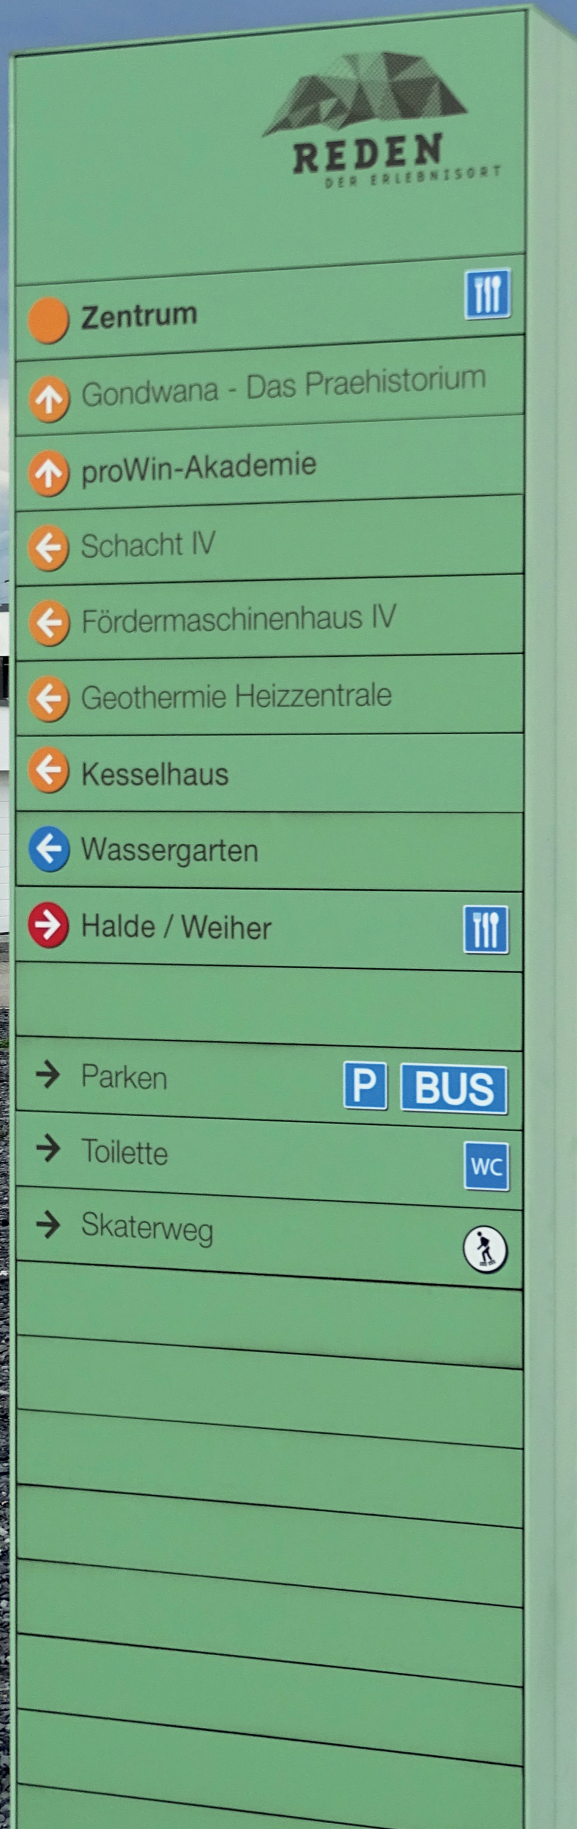

Active cities and adventure worlds require information elements with flexibly changeable panels. Concealed and protected against vandalism, the surfaces of the Flex monoliths can be individually re-labelled and exchanged.



08.2020 ■ ■ ■ www.meng.de

## Flex-Monolith Q60AV

The mounting grid 100 mm is standard. Individual grids can be made to measure.



Σ quintessenz

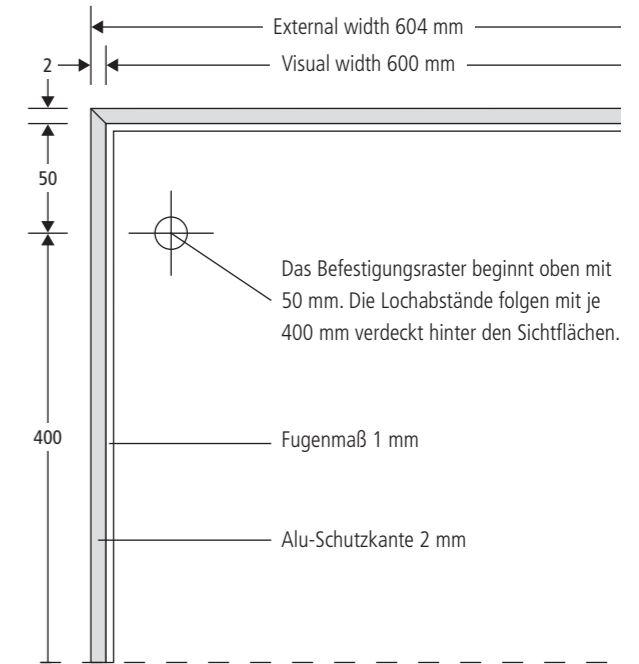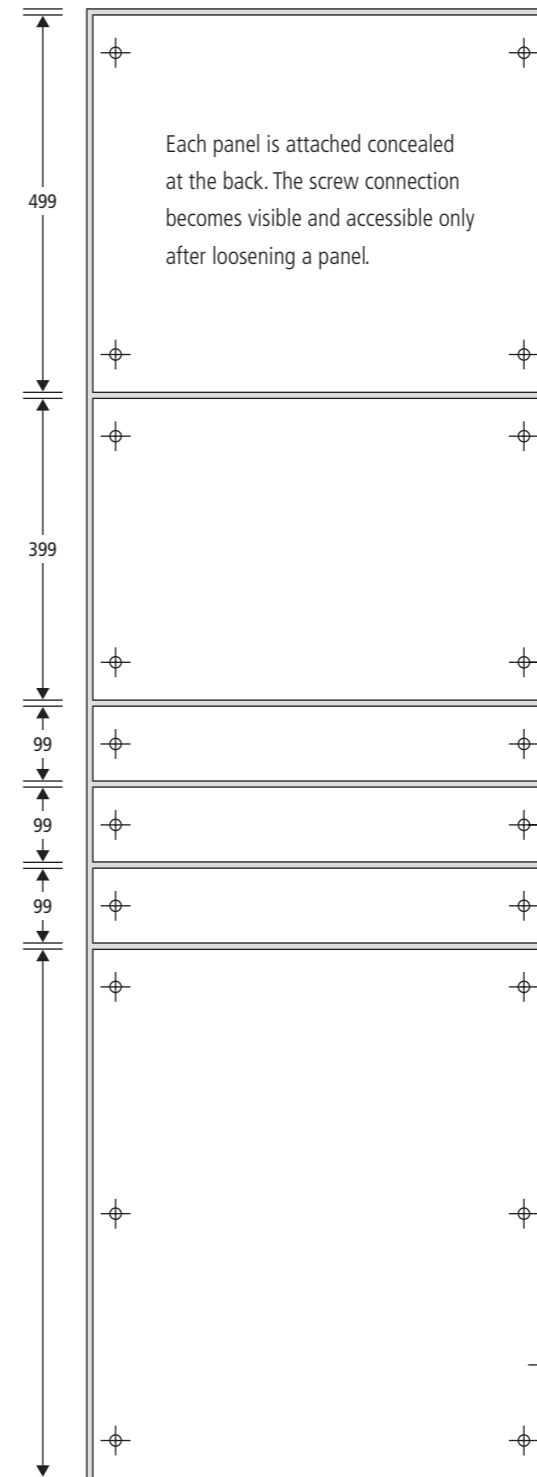

Additional holes are milled for smaller panel pitches. For subsequent smaller pitches, additional holes can also be easily redrilled using a template.

The smallest possible panel height is 99 mm + 1 mm joint. These narrow panels must be stiffened at the back for stability reasons.

Plinth panels are only available as custom-made products.

Q60AV 22060	Q60AV 22060	Q60AV 5060-2
Q60AV stands for quintessenz 60 mm installation depth External signs with variable panels	220 Height in cm 60 Width in cm	50 Single panel height in cm 60 System width in cm 2 Sheet thickness 2 mm
Article description	Size	Panel areas