

Outdoor-Stele berta QKAD

Standard displays set up for permanent outdoor use.



Σ quintessenz



Informative and functional in all weather conditions


With **berta** meng has developed an outdoor stele that protects all electronic components in an encapsulated climate cell. **berta** is made entirely of an aluminum housing that is painted or labeled according to customer requirements. As an impressive media stele, **berta** thus meets the requirements for a largely monolithic design.

Outdoor-Stele berta QKAD

Electronically regulated climate conditioning limits energy consumption to a minimum.



Σ quintessenz

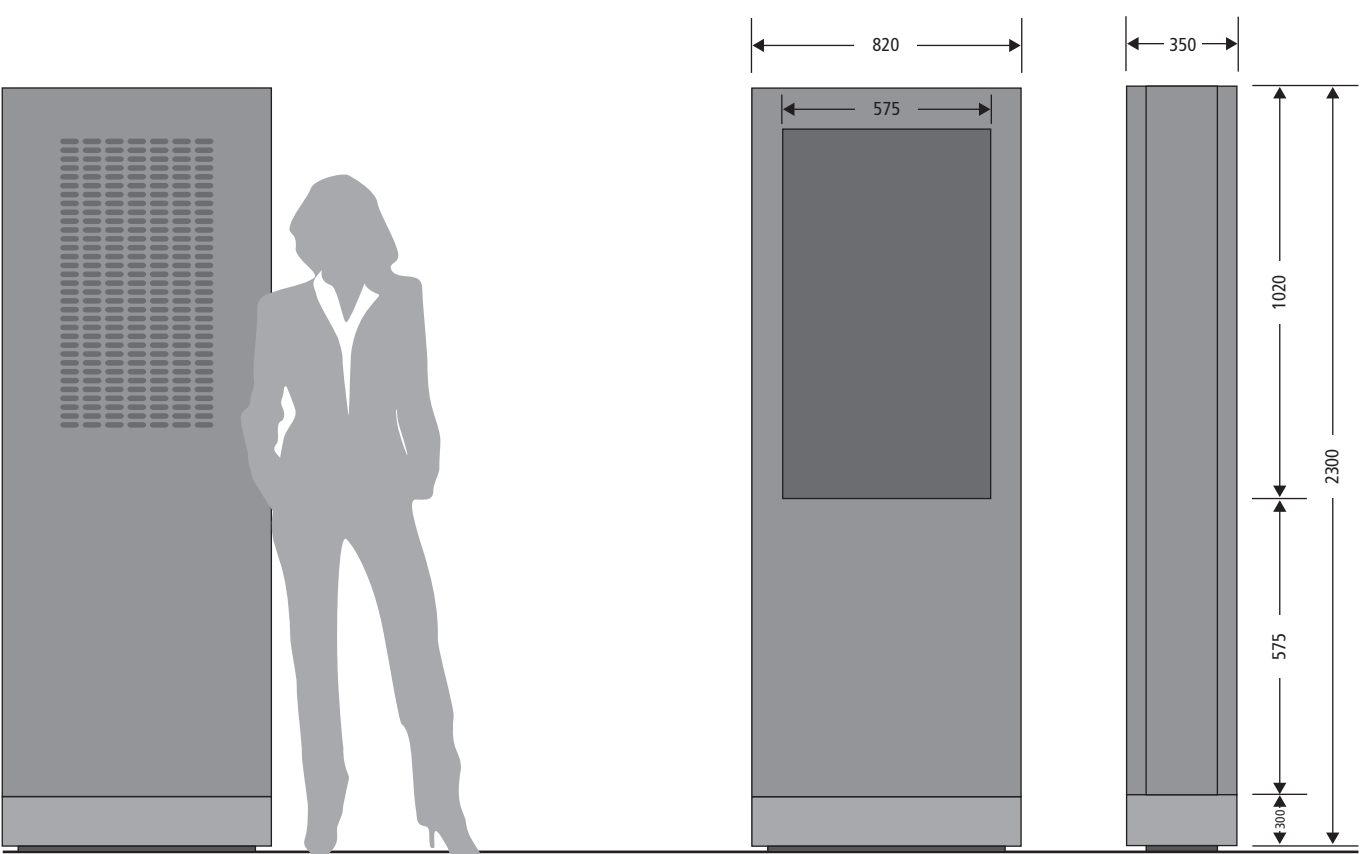

Rear view

equivalent to front view, except without screen.

Front view

with climate screen container. Lower area available for individual customization, e.g. by an illuminated map.

Side view

with justified metal protection edges, width 350 mm, lacquered.

Hardware

The outdoor stele **berta** is a self-contained system. Except for two discreet locks preventing unauthorized access to key components, no screws or fasteners are visible. An electronically regulated system of cooling, heating and ventilation elements provides an optimal temperature for minimal heat and noise emission. The system requires a bright screen secured by non-reflecting security glass. **berta** is available both pre-equipped with a workstation and screen or as fully customizable version. Please enquire about our comprehensive CMS solution.

Screen

- 46" LED-Display
- Resolution 1,920 x 1,080 Full HD
- Brightness: 700 cd/m2
- Contrast: 10,000:1

Computing unit

- Processor: intel i5
- RAM: 4 GB
- HDD: 320 GB

Measures

- Height 2300 mm
- Width 820 mm
- Depth 350 mm

Power and data connection

- 230 V
- LAN, or
- optional W-LAN

QKAD 23082 N47 S		QKAD 23082 N47 S		QKAD 23082 N47 S	
QKAD	stands for quintessenz climate aluminum stele digital	230	Height in cm	N	NonTouch
		82	Width in cm	47	47" Screen size incl. Media PC without content management system
				S	E6/EV1 silber anodised
Article description		Size		Standard	
				Customizing	
				LED lit map .	